


See drawing 600A105499

IP20 graded parts. To be mounted in a dry place.

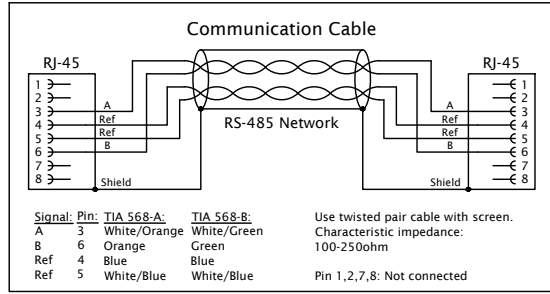

RS-485 network:
Use 2x or 4x twisted pair cable with screen.

Characteristic impedance: 100-250ohm. Suitable cables can be cable for Profibus, Interbus, Ethernet, Cat5, Cat6 ++

Keep communication cable separated from power lines

ALL CABLES TO BE SUPPLIED BY YARD, UNLESS OTHERWISE NOTED.

	R. Stahl Tranberg AS Strandsvingen 6, N-4032 Stavanger, Norway info@stahl-tranberg.com	Projection 	Unless otherwise specified: Dimensions are in mm. Tolerances according to ISO 2768-M.	
			600A105052	
Searchlight and Power Supply Xenon 1000W Part No: 4587 Wiring Diagram		Page: 1 Total: 1	Format A3	
		Scale: None		
		Date: 30.06.2010	Design: GRS	
<small>The information contained in this drawing is the sole property of R. Stahl Tranberg AS. Any reproduction in part or as a whole without the written permission of R. Stahl Tranberg AS is prohibited.</small>				