

# TRANBERG® Searchlight

TEF 2620 Halogen 250W, Direct Operated

Safe Area



R. Stahl Tranberg's searchlights are all designed for rough environments. It is the policy of R. Stahl Tranberg to provide products and services that meet the highest standards of quality in the industry.

Our aim is to fulfill the expectations of our customers. This requires that all products perform reliably, efficiently and in a manner that assures persisting market competitiveness.

## Application

- The Halogen searchlight can be used on fishing boats, rescue vessels and tugboats.

## Features and benefits

- Applicable to sub-zero temperatures of -50°C (-58°F).
- Top mirrored E40 halogen lamp

## Options

- Pedestal
- Canvas cover
- Anti-condensation heater in drum



## Technical Data

Control panel:	TEF 2610
Material:	Stainless steel, Toughened soda lime glass, silverplated glass.
Finish:	All white surface powder coated (RAL 9010) to 70-80uM.
Ingress protection:	IP56 (DIN40050)
Weight searchlight:	36kg
Weight pedestal:	4,8kg / 10,2kg

**TRANBERG** **STAHL**

THE STRONGEST LINK.

## R. STAHL TRANBERG AS

Main office | Strandsvingen 6 | N-4032 Stavanger, Norway | T +47 51 57 89 00 | E info.no-st@r-stahl.com | stahl-tranberg.com  
Oslo office | Lührtoppen 2 | N-1470 Lørenskog, Norway | T +47 24 08 44 10 | E info.no-os@r-stahl.com | stahl-tranberg.com

# TRANBERG® Searchlight

TEF 2620 Halogen 250W, Direct Operated

Safe Area


## Optical

Mirror size	Watt	Volt	Peak Beam Candle Power	Range M 1 lux at target	Divergence	Pan°	Tilt°	Part no.
305mm (12") Halogen	250	24	2,1x10 <sup>6</sup>	1320	6°	370	+15 -35	2620218210

**Optical Performance:** All data shown above is theoretical and calculated to IES Formulae


## Dimensions

Front view without stand




600A102895

Front view with stand

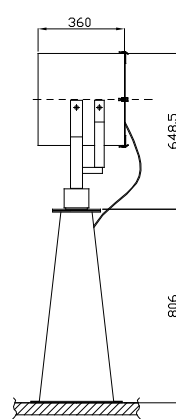


600A102895

Front view with stand (Option)




600A103623

Dimensions on stand



600A102290

Dimensions on flange (Option)



600A103623