TRANBERG® JUNCTION BOX

TEF 1058, Size 25, Max. 16mm² 750V

Zone 1, Zone 2 & Safe Area









Tranberg has manufactured junction boxes for hazardous areas since the beginning of the Norwegian oil history. Our solutions for junction boxes are developed together with customers to meet the demands for flexibility and best solutions. This model is certified to both ATEX and IECEx.

Development and manufacturing of this product is done at our factory in Stavanger, Norway.

Application

- Suitable for use in hazardous area, zone 1, zone 2 and safe area.
- The TEF 1058 series are used for a wide range of installations. E.G. Electro, Instrument and Telecom.

Features and benefits

- To be equipped according to component list.
- Only appropriate ATEX/IECEx certified glands, blanks and adaptors must be used.

Approvals and certificates


IECEx certificate No.: IECEx PRE 14.0001
ATEX certificate No.: Presafe 14 ATEX 4124

Compliance standards:

Directive 2014/34/EU

Refer to EU Declaration of conformity for more details.

Refer to UK Declaration of conformity for more details.

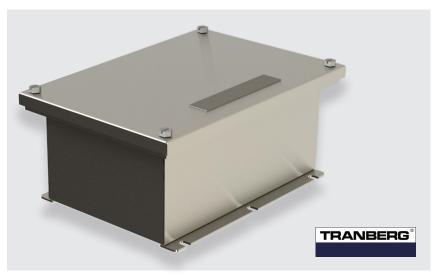

Technical Data	
Material housing:	Stainless steel AISI 316L / EN 1.4404
Material gasket:	EPDM / Silicone
Finish:	Electro polished / Bright chemical dip
Earthing:	Inside on busbar or terminals. External earth bolt on mid right side.
Ingress protection:	IP66 / IP67
Ambient temperature:	Empty enclosure w/ EPDM gasket: -40°C to +80°C
	Empty enclosure w/ silicone gasket: -60°C to +135°C
	Equipped enclosure depends on the amb. temp. for the internal components.
Weight:	Approx. 1,7 kg (empty box)
Ex protection:	€ II 2 G Ex eb IIC T5 Gb



TRANBERG® JUNCTION BOX

TEF 1058, Size 25, Max. 16mm² 750V


Zone 1, Zone 2 & Safe Area

Part No Matrix

Product series	Finish / Design			Туре			
	0	Bright chemical dip	0	Empty box			
105825	1	Electro polished	1	With horizontal terminal rail and PE bus bar			
	2	Arctic version					

Recommended number of cable glands


Cable gland threads	Side A/B	Side C/D
M16	8 pcs	12 pcs
M20	6 pcs	10 pcs
M25	6 pcs	10 pcs
M32	2 pcs	4 pcs
M40	2 pcs	3 pcs



Conductor size mm ²		1,5	2,5	4	6	10	16
	3	36	30	30	22	18	15
	10	22					
	16		21				
Current (A)	20			20			
	25				17		
	35					13	
	63						5

Max. no of conductors for given cross-section and load.

Dimensions



Dimensions	Height	Width	Depth
Internal dimensions	140 mm	218 mm	100 mm
External dimensions	175 mm	253 mm	108 mm

