
## ACCESSORIES



Contact CMP for more information regarding accessories and substrates.

 $\bigcirc$ 

6




Please refer to local PPE regulations.

www.cmp-products.com

	Cable Cleat Specification							
	Name	Туре	Material	Certification	Size Range	Temp Range	Liner Type	Bolt(s)*
	PATRIOT	SDSS	Stainless Steel	IEC 61914	17 - 128mm in 24 sizes Trefoil Formation		Low Smoke & Fume (LSF) Zero Halogen (LSOH) Polymer	2 x Outer M10 or 1 x Centra M10
	SOVEREIGN	HDSS	Stainless Steel			-50°C to +60°C		2 x Outer M10 or 1 x Centra M12
	HURON	LDAL	Aluminium		19 - 128mm in 23 sizes Trefoil Formation			2 x Outer M10 or 1 x Centra M10
	RELIANCE	SDAL	Aluminium					
	SAPPHIRE	SHDSS	Stainless Steel		19 - 150mm in 13 sizes Single / Parallel Formation			2 x Outer M10 or 1 x Centra M12

**HINGED CABLE CLEATS** 

PATRIOT SDSS HURON LDAL **RELIANCE SDAL** SOVEREIGN HDSS SAPPHIRE SHDSS



## All products are short-circuit tested. Please visit www.cmp-products.com for further details.

Note: Fixings not included. For more information on fixings please visit www.cmp-products.com and download the Cleat Fixing Pack data sheet. Any other queries please contact CMP via email customerservices@cmp-products.com.

There are no restrictions on the mounting orientation of the cleats.

\* The number of bolts used is based on individual site specification.


Tel: +44 (0) 191 265 7411 Fax: +44 (0) 1670 715 646 E-mail: customerservices@cmp-products.com

© Copyright CMP Products Limited 2017. All rights reserved.

FI543 REV 3 12/18

GLOBAL



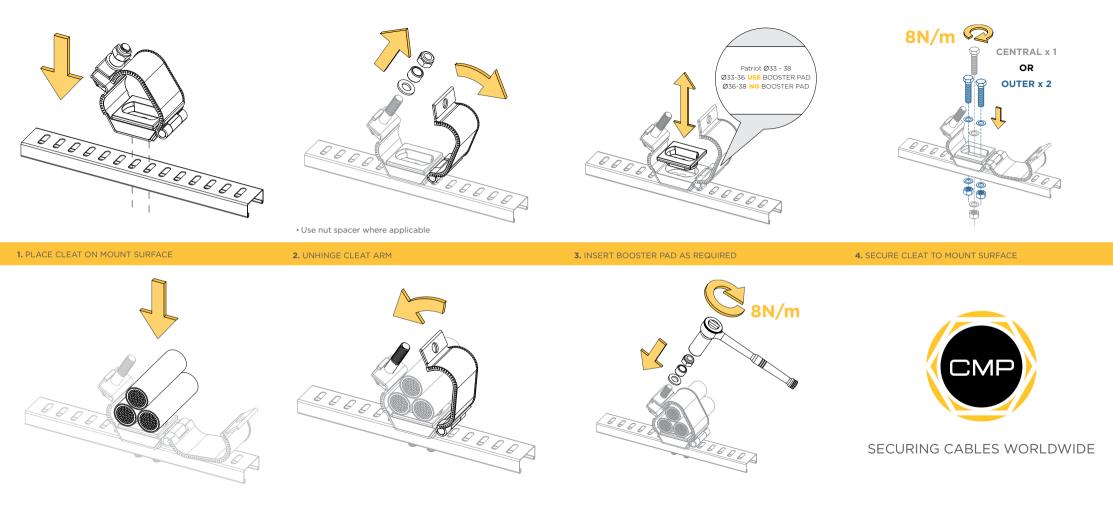

6. CLOSE CLEAT ARM