TRANBERG® JUNCTION BOX

TEF 1058, Size 30, Max. 16mm² 750V Zone 1, Zone 2 & Safe Area



Tranberg has manufactured junction boxes for hazardous areas since the beginning of the Norwegian oil history. Our solutions for junction boxes are developed together with customers to meet the demands for flexibility and best solutions. This model is certified to both ATEX and IECEx. Development and manufacturing of this product is done at our factory in Stavanger, Norway.

Application

- Suitable for use in hazardous area, zone 1, zone 2 and safe area.
- The TEF 1058 series are used for a wide range of installations. E.G. Electro, Instrument and Telecom.

Features and benefits

- To be equipped according to component list.
- Only appropriate ATEX/IECEx certified glands, blanks and adaptors must be used.

Approvals and certificates

IECEx certificate No.: IECEx NEM 14.0001 ATEX certificate No.: Presafe 14 ATEX 4124

Compliance standards:

Directive 2014/34/EU Refer to EU Declaration of conformity for more details. Refer to UK Declaration of conformity for more details.



Technical Data						
Material housing:	Stainless steel AISI 316L / EN 1.4404					
Material gasket:	EPDM / Silicone					
Finish:	Electro polished / Bright chemical dip					
Earthing:	Inside on busbar or terminals. External earth bolt on mid right side.					
Ingress protection:	IP66 / IP67					
Ambient temperature:	Empty enclosure w/ EPDM gasket: -40°C to +80°C					
	Empty enclosure w/ silicone gasket: -60°C to +135°C					
	Equipped enclosure depends on the amb. temp. for the internal components.					
Weight:	Approx. 2,2 kg (empty box)					
Ex protection:	🚯 II 2 G Ex eb IIC T5 Gb					



R. STAHL TRANBERG AS

Main office | Strandsvingen 6 | N-4032 Stavanger, Norway | **T** +47 51 57 89 00 | **E** info.no-st@r-stahl.com | stahl-tranberg.com Oslo office | Luhrtoppen 2 | N-1470 Lørenskog, Norway | **T** +47 24 08 44 10 | **E** info.no-os@r-stahl.com | stahl-tranberg.com

TRANBERG® JUNCTION BOX


TEF 1058, Size 30, Max. 16mm² 750V Zone 1, Zone 2 & Safe Area

Part No Matrix

Product series	Finish / Design		Туре			
105830	0	Bright chemical dip	0	Empty box		
	1	Electro polished	1	With horizontal terminal rail and PE bus bar		
	2	Arctic version				

Recommended number of cable glands


Cable gland threads	Side A/B	Side C/D		
M16	8 pcs	18 pcs		
M20	6 pcs	16 pcs		
M25	6 pcs	14 pcs		
M32	2 pcs	6 pcs		
M40	2 pcs	4 pcs		



Conductor size mm ²		1,5	2,5	4	6	10	16
	3	55	46	46	35	28	23
	10	22					
	16		21				
Current (A)	20			21			
	25				19		
	35					14	
	63						6

Max. no of conductors for given cross-section and load.

Dimensions

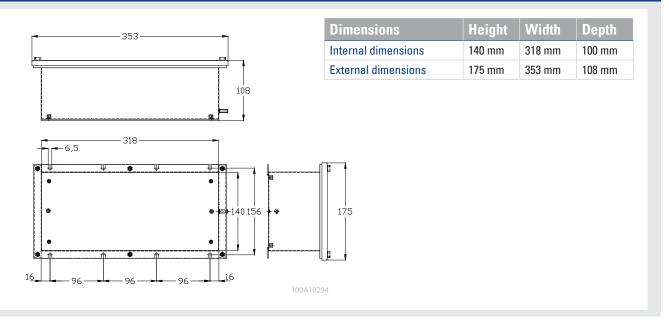



R. STAHL TRANBERG AS

Main office | Strandsvingen 6 | N-4032 Stavanger, Norway | **T** +47 51 57 89 00 | **E** info.no-st@r-stahl.com | stahl-tranberg.com Oslo office | Luhrtoppen 2 | N-1470 Lørenskog, Norway | **T** +47 24 08 44 10 | **E** info.no-os@r-stahl.com | stahl-tranberg.com