## **TRANBERG® LED DECKLIGHT**

**TEF 2760** 

For Area Lighting on Vessels

CE

TRANBERG® TEF2760 delivers high light output, combined with simple installation and no maintenance. The LED illumination provides instant-on at any ambient temperature, and is available with built-in battery for up to 3hrs of operation. TEF2760 is

**Application** 

Watertight luminaire for harsh marine applications, such as open decks, engine rooms, holds, storage yards, working spaces, and open areas.

#### **Features and benefits**

- Versatile light fixture for a wide range • of marine applications.
- Economic luminaire with high light out-• put.
- Designed and manufactured for ma-• rine requirements.
- Housing in AISI 316L for outdoor applications.
- Powder coated for easy maintenance . and cleaning
- Multiple mounting options available: • Bolt-on (H), sideways mounting (W), and end mounting brackets (WD).
- High color retention
- 3 hr battery backup available. •
- Low weight and installation friendly

### **Approvals and certificates**

CE

available for several mounting options, and is built in powder-coated stainless steel AISI316L. With one cable plug in each end of the luminaire, it is ready for throughwiring with multiple luminaires connected in parallel.



Technical Data		
Material:	Stainless steel powder coated white, Polycarbonate diffuser	
Input voltage:	220-240V AC	
Power consumption:	22W / 44W	
Operating temperature:	-25°C to +45°C 0°C to +45°C when on battery backup power	
Light Source:	LED	
Light output:	3400lm / 6800lm	
Color temperature:	4000K	
CRI:	>80	
Lifetime:	100,000 hrs / L70 at Ta45°C (driver)	
Ingress protection:	IP66/67	
Weight:	3,9 kg / 6,1 kg	
Mounting:	Several mounting options available	
Cable entries:	One M20 plastic cable gland in each end (cable Ø 6-12mm)	



THE STRONGEST LINK.


# TRANBERG® LED DECKLIGHT

TEF 2760

### For Area Lighting on Vessels

Description	Bracket Type	Part No.
TEF2760 LED Decklight SS316, 3400lm, 22W, 4000K, 230VAC	W	276000200
TEF2760 LED Decklight SS316, 3400lm, 22W, 4000K, 230VAC	WD	276000210
TEF2760 LED Decklight SS316, 3400lm, 22W, 4000K, 230VAC, W/Battery	WD	276000211
TEF2760 LED Decklight SS316, 3400lm, 22W, 4000K, 230VAC	WN	276000220
TEF2760 LED Decklight SS316, 3400lm, 22W, 4000K, 230VAC, W/Battery	WN	276000221
TEF2760 LED Decklight SS316, 6800lm, 44W, 4000K, 230VAC	W	276010200
TEF2760 LED Decklight SS316, 6800lm, 44W, 4000K, 230VAC	WD	276010210
TEF2760 LED Decklight SS316, 6800lm, 44W, 4000K, 230VAC, W/Battery	WD	276010211
TEF2760 LED Decklight SS316, 6800lm, 44W, 4000K, 230VAC	WN	276010220
TEF2760 LED Decklight SS316, 6800lm, 44W, 4000K, 230VAC, W/Battery	WN	276010221

### Dimensions

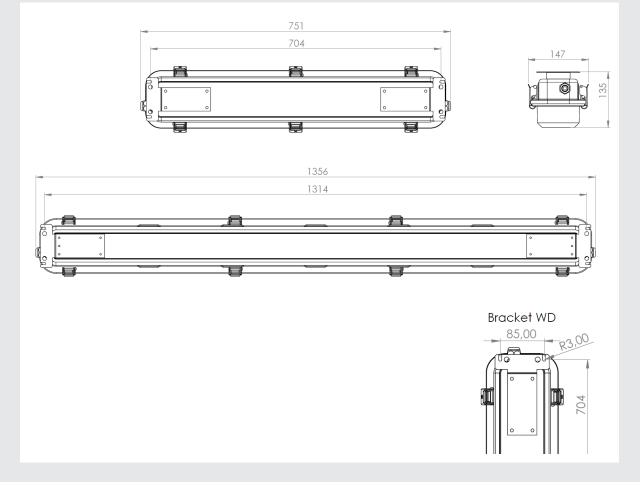

#### For more details, please see the user manual (TUM7619)

